

# DH-HAP200

## Hi-fidelity Pickup

[www.PadVokam.by](http://www.PadVokam.by)



### Features


- Plastic material
- Easy to install
- ALC processing circuit
- Basic noise reduction
- Support cascading

## Technical Specifications


| Model                           | DH-HAP200                                                                        |
|---------------------------------|----------------------------------------------------------------------------------|
| General                         |                                                                                  |
| Scope                           | 10~100 m <sup>2</sup>                                                            |
| Sensitivity                     | -30dB                                                                            |
| Frequency response              | 20Hz~20kHz                                                                       |
| Directional characteristic      | Omni-directional                                                                 |
| SNR                             | 80dB(1m 40dB sound source SPL)<br>50dB(10m 45dB sound source SPL)<br>1kHz at 1Pa |
| Dynamic range                   | 104dB(1KHz at Max dB SPL)                                                        |
| Max. sustainable sound pressure | 120dB SPL(1KHz, THD 1%)                                                          |
| Output impedance                | 600Ω(non-equilibrium)                                                            |
| Output signal amplitude         | 2.5Vpp/-25dB                                                                     |
| Microphone                      | Electret condenser microphone                                                    |
| Working voltage                 | DC 12V(9~18V)                                                                    |
| Working current                 | 50mA                                                                             |
| Working temperature             | -25°C~+70°C(-13°F~+158°F)                                                        |
| Material                        | PC+ABS                                                                           |
| Color                           | White+silver                                                                     |
| Dimension                       | 79.6mmx79.6mmx21.5mm (3.13"x3.13" x0.85")                                        |
| Weight                          | 0.06kg(0.13lb)                                                                   |
| Certification                   | CE/FCC                                                                           |

## Interface information

- RCA female connector \*2
- DC power connector

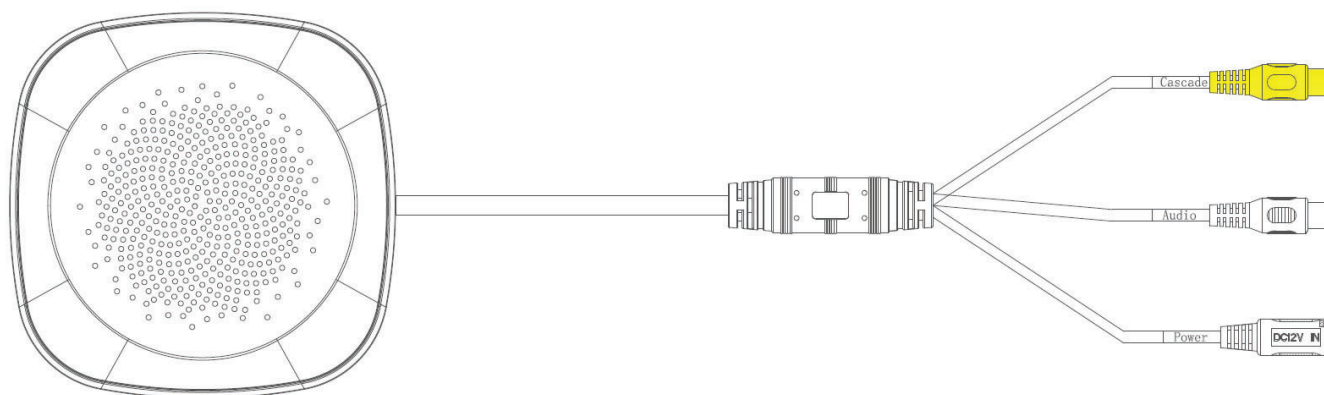

## Dimensions (mm/inch)

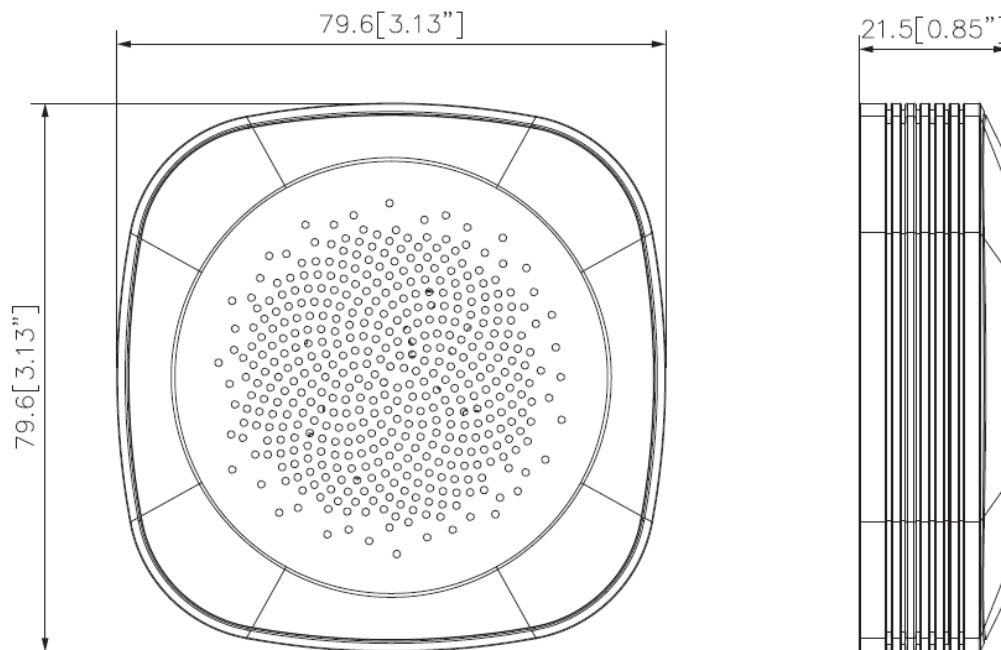

## Package Information

- Hi-fidelity pickup \*1
- ST4x25 screw \*3
- Plastic anchor \*3
- Mounting sticker\*1