

# DHI-VTO2111D-WP

1MP Wi-Fi Villa Outdoor Station

www.PadVokam.by



## Features

- HD CMOS camera
- Large field of view angle
- Night vision
- Voice indication
- Remote intercom with mobile APP
- Surface mounted



## Technical Specification

|      |                 |
|------|-----------------|
| Mode | DHI-VTO2111D-WP |
|------|-----------------|

### System

|                  |                          |
|------------------|--------------------------|
| Main Processor   | Embedded Micro Processor |
| Operation System | Embedded LINUX OS        |

### Video

|                   |               |
|-------------------|---------------|
| Video Compression | H.264         |
| Image Sensor      | 1/4" 1MP CMOS |
| Lens              | 2.2mm         |
| Angle of View     | D:125° H:105° |
| Day/Night         | ICR           |

### Audio

|                    |                                     |
|--------------------|-------------------------------------|
| Audio Compression  | G.711                               |
| Audio Input        | Omnidirectional Mic                 |
| Audio Output       | Built-in Speaker                    |
| Bidirectional Talk | Support Dual-way Bidirectional talk |

### Operation Mode

|                  |                          |
|------------------|--------------------------|
| Keypad           | Single Mechanical Button |
| Reader           | Mifare Card              |
| Body Approaching | 1m                       |

### Interface

|              |                                                                   |
|--------------|-------------------------------------------------------------------|
| Door Control | 2(1 relay out for main lock, 1 extended by access control module) |
| Alarm In     | 2(1ch unlock button, 1ch feedback)                                |
| RS485        | 1                                                                 |

### Network


|       |               |
|-------|---------------|
| Wi-Fi | IEEE802.11b/g |
|-------|---------------|

|                  |                           |
|------------------|---------------------------|
| Ethernet         | 10M/100Mbps Self-adaptive |
| Network Protocol | TCP/IP                    |

### General

|                      |                        |
|----------------------|------------------------|
| Ingress Protection   | IP65                   |
| Tamper Switch        | 1                      |
| Memory Slot          | Micro SD, Max 32G      |
| Installation         | Surface                |
| Material             | Plastic                |
| Power                | DC 12V,PoE(802.3af)    |
| Power Consumption    | Standby ≤1W, Work ≤10W |
| Working Environments | -30°C~+60°C            |
| Relative Humidity    | 10%~90%RH              |
| Dimensions           | 135mm×70.4mm×34.4mm    |
| Weight               | 0.4Kg                  |


## Dimensions

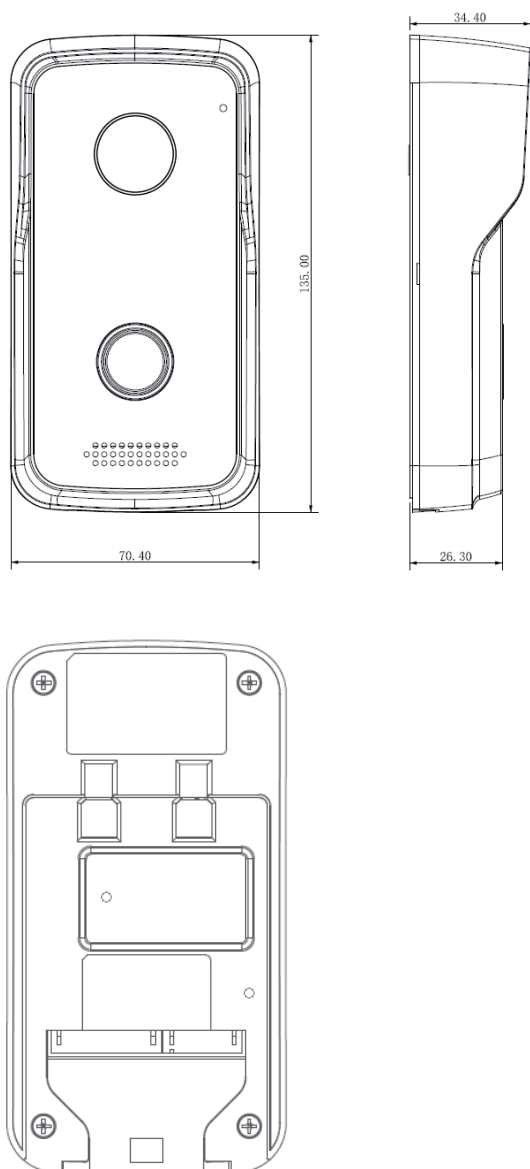

## Application

### 1 – Smart Doorbell

Call Mobile phone APP directly without indoor monitor

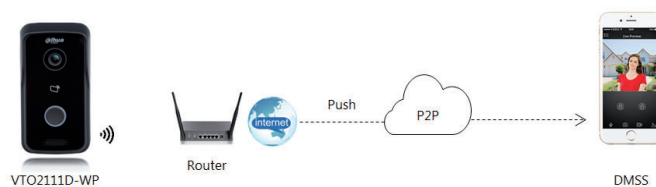

### 2 – Video Intercom

- Color video & audio call
- IPC surveillance
- Alarm integration
- Remote intercom with mobile APP

