

VTH1550CH

IP Indoor Monitor

www.PadVokam.by



Features

- 7" TFT Capacitive touch screen
- IPC surveillance
- Alarm integration
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)




Installation	Surface
Power	DC 12V/ supply directly by VTNS1060A
Power Consumption	Standby ≤1.5W, Work ≤7W
Working Temperature	-10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	200.5mm×136.5mm×22.0mm
Weight	0.8Kg


Technical Specification

Model	VTH1550CH
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Audio	
Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Display	
LCD Screen	7" 800x480, Capacitive
Operation Mode	
Input	Touch buttons
Interface	
Alarm In	6
Alarm Out	1
RS485	1
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Memory Slot	Micro SD, Max 32GB

Dimensions

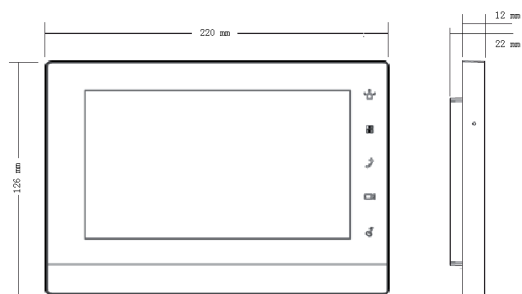

View Area

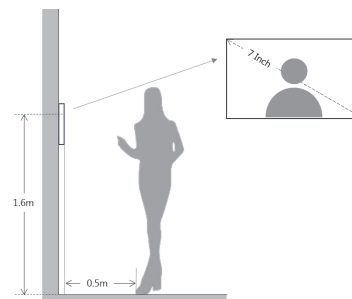

Application

