

VTH1560B/BW

IP Indoor Monitor

www.PadVokam.by



Features


- 7" TFT Capacitive touch screen
- IPC surveillance
- Alarm integration
- Embedded 8GB SD card
- Record & Snapshot




Technical Specification	
Model	VTH1560B/BW
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Audio	
Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Display	
LCD Screen	7" 800x480, Capacitive
Operation Mode	
Input	Touch buttons
Interface	
Alarm In	8
Alarm Out	-
RS485	-
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Memory Slot	Embedded 8GB

Installation	Flush
Power	DC 12V/ supply directly by VTNS1060A
Power Consumption	Standby ≤1.5W, Work ≤7W
Working Temperature	-10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	221.2mm×154.3mm×24.2mm
Weight	0.8Kg

Dimensions

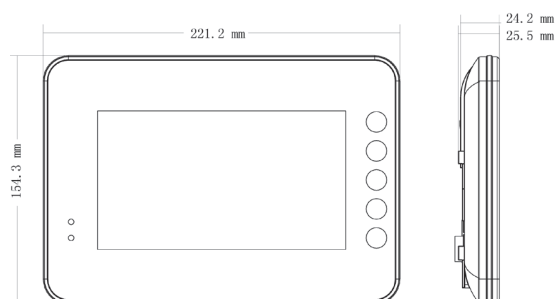

View Area

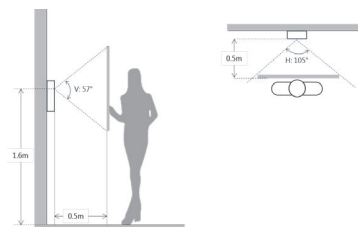

Application

