

VTO1210C-X

Apartment Outdoor Station

www.PadVokam.by



Features

- HD CMOS camera
- Stainless steel panel, IP54, IK07
- Night vision & Voice indication
- Local card opening
- Video & Audio messaging
- Surface & Flush mounted



Technical Specification

Model	VTO1210C-X
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Image Sensor	1/3" 1.3MP CMOS
Lens	3.6mm
Angle of View	D:95° H:75°
Day/Night	Color Image
Audio	
Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Display	
LCD Screen	3" STN 128x64
Operation Mode	
Keypad	Mechanical Button
Reader	Mifare Card
Approaching Induction	
Body approaching	1m
Interface	
Door Control	1

Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1



Network

Ethernet	10M/100Mbps
Network Protocol	TCP/IP

General

Ingress Protection	IP54, IK07
Tamper Switch	1
Installation	Surface & Flush
Material	Stainless steel
Power	DC 12V
Power Consumption	Standby ≤1W, Work ≤10W
Working Temperature	-40°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	143.0mm×406.0mm×42.0mm
Weight	1.6Kg

View Area

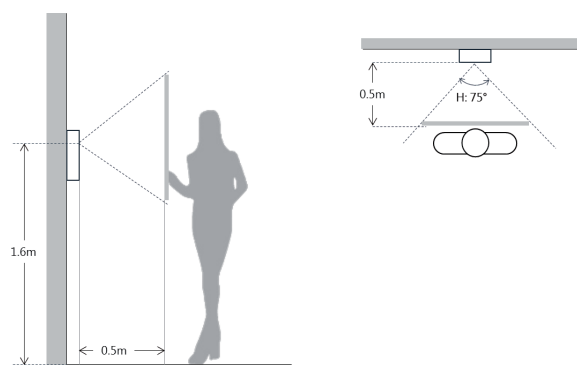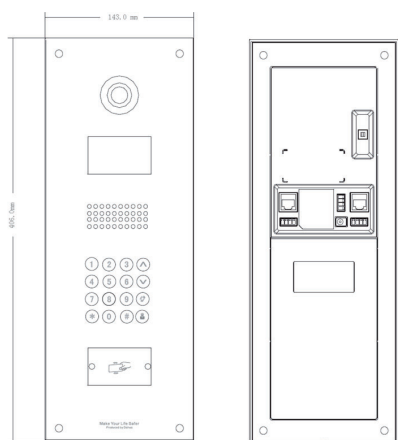

Application

